




TBD Bearing Machinery Co., Ltd

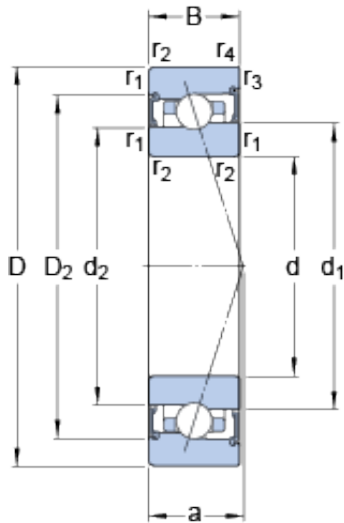

S71918 CB/HCP4A Bearing 2D drawings and 3D CAD models

90 mm x 125 mm x 18 mm 90 mm x 125 mm x 18 mm SKF S71918 CB/HCP4A angular contact ball bearings

Bearing No. S71918 CB/HCP4A

Size	125x90x18 mm
Bore Diameter	125 mm
Outer Diameter	90 mm
Width	18 mm
d	90 mm
D	125 mm
B	18 mm
d ₁	103 mm
d ₂	101.4 mm
D ₂	115 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	27.5 mm
d _a - min.	96 mm
d _a - max.	102.3 mm
d _b - min.	96 mm
d _b - max.	100.7 mm
D _a - max.	119 mm
D _b - max.	121.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	17.8 kN
Basic static load rating - C ₀	17.6 kN



TBD Bearing Machinery Co., Ltd

Fatigue load limit - P_u	0.72 kN
Limiting speed for grease lubrication	16000 r/min
Ball - D_w	7.144 mm
Ball - z	36
Calculation factor - f_0	10
Preload class A - G_A	59 N
Preload class B - G_B	120 N
Preload class C - G_C	355 N
Calculation factor - f	1.12
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.03
Calculation factor - f_{2C}	1.08
Calculation factor - f_{HC}	1.01
Preload class A	59 N/micron
Preload class B	78 N/micron
Preload class C	124 N/micron
d_1	103 mm
d_2	101.4 mm
D_2	115 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	96 mm
d_a max.	102.3 mm
d_b min.	96 mm
d_b max.	100.7 mm
D_a max.	119 mm
D_b max.	121.8 mm
r_a max.	1 mm
r_b max.	0.6 mm



TBD Bearing Machinery Co., Ltd

Basic dynamic load rating C	23.8 kN
Basic static load rating C_0	28.5 kN
Fatigue load limit P_u	0.72 kN
Attainable speed for grease lubrication	16000 r/min
Ball diameter D_w	7.144 mm
Number of balls z	36
Preload class A G_A	59 N
Static axial stiffness, preload class A	59 N/ μ m
Preload class B G_B	120 N
Static axial stiffness, preload class B	78 N/ μ m
Preload class C G_C	355 N
Static axial stiffness, preload class C	124 N/ μ m
Calculation factor f	1.12
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.03
Calculation factor f_{2C}	1.08
Calculation factor f_{HC}	1.01
Calculation factor f_0	10
Mass bearing	0.58 kg